

Standard fittings

MANUAL WELDING TORCHES

gas cooled

MIG/MAG



DINSE

Torch sets

2 - 330


Torch type

DIX MS 2 - 330

DIX MG 2 - 330

DIX MC 2 - 330

DIX MML 2 - 330

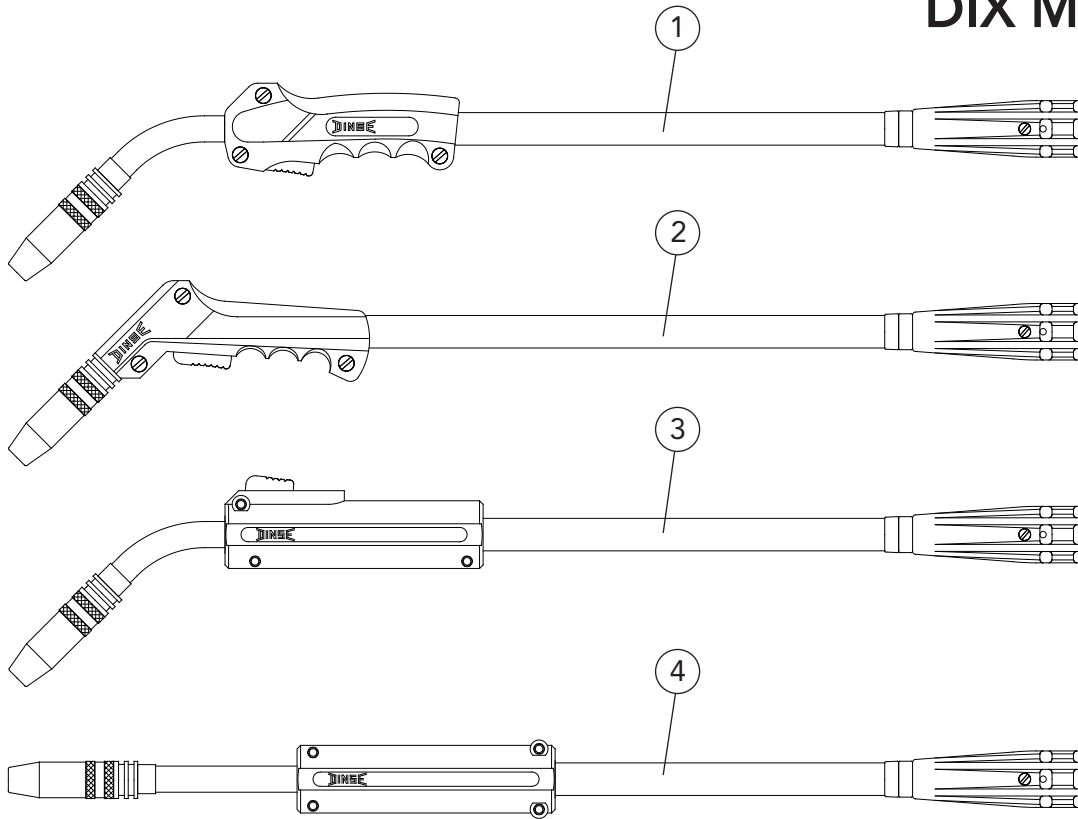

| Pos. | Description | Dimension | Part number | Article number |
|------|-------------|------------|--------------------|----------------|
| 1 | Torch set | 52° 3,00 m | DIX MS 2 - 330 - 3 | 620 013 313 0 |
| | Torch set | 52° 4,00 m | DIX MS 2 - 330 - 4 | 620 013 314 0 |
| 2 | Torch set | 52° 3,00 m | DIX MG 2 - 330 - 3 | 620 003 313 0 |
| | Torch set | 52° 4,00 m | DIX MG 2 - 330 - 4 | 620 003 314 0 |
| 3 | Torch set | 52° 3,00 m | DIX MC 2 - 330 - 3 | 620 033 313 0 |
| | Torch set | 52° 4,00 m | DIX MC 2 - 330 - 4 | 620 033 314 0 |
| 4 | Torch set | 0° 3,00 m | DIX MML2 - 330 - 3 | 620 023 303 0 |
| | Torch set | 0° 4,00 m | DIX MML2 - 330 - 4 | 620 023 304 0 |

► Standard equipment for wire diameter 1,0 mm steel with gas nozzle diameter 15 mm, DIX 1-2-315 TR, (contact tip DIX 3-2-1,0 M8, set back, tip adapter DIX 4-2-K M8, liner DIX DS 4/1,8). Variants deviating of the standard fittings on request.

subject to change!

SEGB-MS-MG2-330\K03

